




RF RGBW and RGB+Dual Color Controller



SR-2858Z4-5C

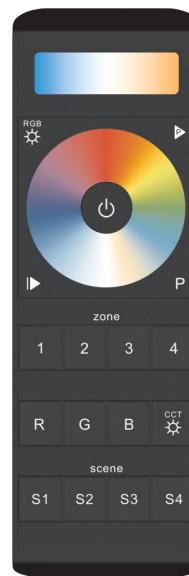

SR-2858Z4



SR-2858Z8

Part No.	Operation Voltage	Operation Frequency	Remarks
SR-2858Z4	4.5VDC	434MHz/868MHz/915MHz	4 zones
SR-2858Z8	4.5VDC	434MHz/868MHz/915MHz	8 zones
SR-2858Z4-5C	4.5VDC	434MHz/868MHz/915MHz	5 channels:RGB+CCT

Product features

- User-friendly interface, easy and simple operation.
- Control 4/8 zones of RF receiver
- RGB+CCT color controller
- Compatible with universal serie RF receiver
- Can save and recall up to 4 scenes.
- 1 receiver can be paired by max 8 different remote controls.



RF Controller:RGB/CCT/Single Color(6 zones)


SR-2819



SR-2819CCT



SR-2819DIM

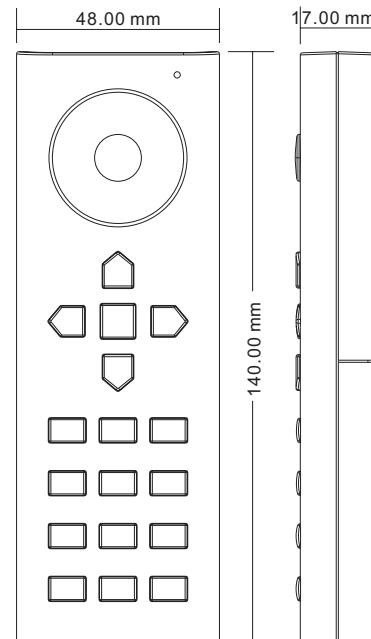

Part No.	Operation Voltage	Operation Frequency	Remarks
SR-2819	4.5VDC	434MHz/868MHz/915MHz	RGBW remote
SR-2819CCT	4.5VDC	434MHz/868MHz/915MHz	CCT remote
SR-2819DIM	4.5VDC	434MHz/868MHz/915MHz	Single color remote

Product features

- Control up to 6 zones, each receiver maximally be controlled by 8 different remotes.
- Compatible with universal serie RF receiver
- Can save and recall up to 6 scenes of each zone.

SR-2819

- Enable to dim brightness of each R, G, B channel, in order to mix millions colors.
- Preset 10 changing modes, with pause function.
- Operation return function.
- Synchronization function of pattern changes ensure consistent change forever.

SR-2839 Series

RF Wireless LED Controller kit (economy)

-RF Receiver

-RF remote



RF RGB Color Controller

Remote

Part No.	Operation Voltage	Operation Frequency	Dimension(mm)
SR-2839	4.5VDC	434MHz/868MHz/915MHz	48x120x17.6
SR-2839WK	3VDC	434MHz/868MHz/915MHz	40x136.5x10.7

Receiver

Part No.	Input Voltage	Output current	Output Power	Output Type
SR-1029	12-24VDC	3CH,5A/CH	180-360W	Constant Voltage

Product features


- Control 1 zone of RF receiver
- RGB color controller
- Compatible with SR-1029 serie RF receiver
- 1 receiver can be paired by max 8 different remote controls.
- Waterproof grade: IP20



SR-2839RGBW



SR-1029RGBW

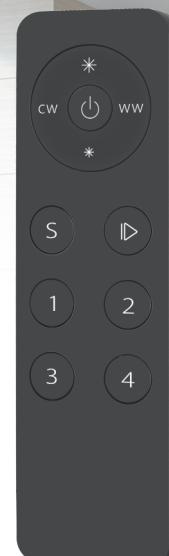

SR-2833CCT



SR-2833CCT
Receiver

RF RGBW Controller

Remote

Part No.	Operation Voltage	Operation Frequency	Dimension(mm)
SR-2839RGBW	4.5VDC	434MHz/868MHz/915MHz	48x120x17.6

Receiver

Part No.	Input Voltage	Output current	Output Power	Output Type
SR-1029RGBW	12-24VDC	4CH,5A/CH	240-480W	Constant Voltage

Product features

- Control 1 zone of RF receiver
- RGBW color controller
- 1 receiver can be paired by max 8 different remote controls.
- Waterproof grade: IP20

RF CCT 2-Pin Controller(for special 2-pin CCT LED strip)

Remote

Part No.	Operation Voltage	Operation Frequency	Dimension(mm)
SR-2833CCT	4.5VDC	434MHz/868MHz/915MHz	39x136x10.7

Receiver

Part No.	Input Voltage	Output current	Output Power	Output Type
SR-2833CCT Receiver	12-24VDC	2CH,5A/CH	120-240W	Constant Voltage

Product features

- Control 4 zones of RF receiver
- CCT color controller
- 1 receiver can be paired by max 8 different remote controls.
- Running mode
- Waterproof grade: IP20